



Optimal

optimal 2500



Tree Spade



Requirements for Power Unit:

A Wheel Loader

- 1 extra hydraulic circuit, double-acting, for implement attachment at front
- hydraulic working pressure 200 - 230 bar (2,900 - 3,340 lbs./in²)
- oil flow 100 - 120 l per minute (22 - 34 GPM)
- tipping load approx. 22.000 kg (48,400 lbs.)
- lift capacity approx. 13.000 kg (28,600 lbs.)
- type of attachment quick-change frame or frame for fixed attachment
- controls: electro-hydraulic valves control element

B Truck

- wheel formula: 6 x 6
- payload: 19.800 kg (43,560 lbs)
- permissible rear axles load, min.: 2 x 13.000 kg (2 x 28,600 lbs.)
- permissible gross weight min.: 33.000 kg (72,600 lbs.)
- length of superstructure, min.: 540 cm (213")
- overhang max.: 80 cm (32")
- wheelbase min.: 390 cm (154")
- PTO drive hydraulic pressure: 200 - 230 bar (2,900 - 3,340 lbs/in²)
- oil flow: 100 - 120 l per minute (22 - 34 GPM)
- raised exhaust controls: manual hand valves

C Special Attachments please inquire



Optimal

optimal 2500



Tree Spade

Digging head:

upper rootball diameter, approx.	A	250 cm	(98")
rootball depth, approx	B	160 cm	(63")
working height	C	280 cm	(110")
working width, gate closed	D	291 cm	(115")
working width, gate open	E	325 cm	(128")
clearance between open gate	F	162 cm	(64")
inner frame diameter	G	178 cm	(70")
weight, empty		6.350 kg	(13,970 lbs.)
volume of rootball, approx.		3,5 m ³	(124 FT ³)
number of blades		5	

Special Features

- telescopic blade cylinders, self-lubricating bearings (abrasion-resistant), 4 folding out spade towers



Superstructure:

transport height	H	285 cm	(111")
transport width	I	277 cm	(109")
min. length of truck platform	L	540 cm	(213")
overall length of superstructure (platform length + overhang)	K	620 cm	(244")
weight, empty		12.800 kg	(20,050 lbs.)

- Base frame (to be bolted to truck chassis),
- 2 articulated lift arms, digging head (as above), rotation on lift arm,
- 2 independently controlled rear stabilizers,
- hydraulic equipment complete with oil tank, hoses, cylinders and manual control valves

The purchaser must ensure that the combination of his truck and the Optimal

tree spade is legal for highway use. Optimal-Vertrieb Opitz GmbH reserves the right to make changes in engineering, design and specifications

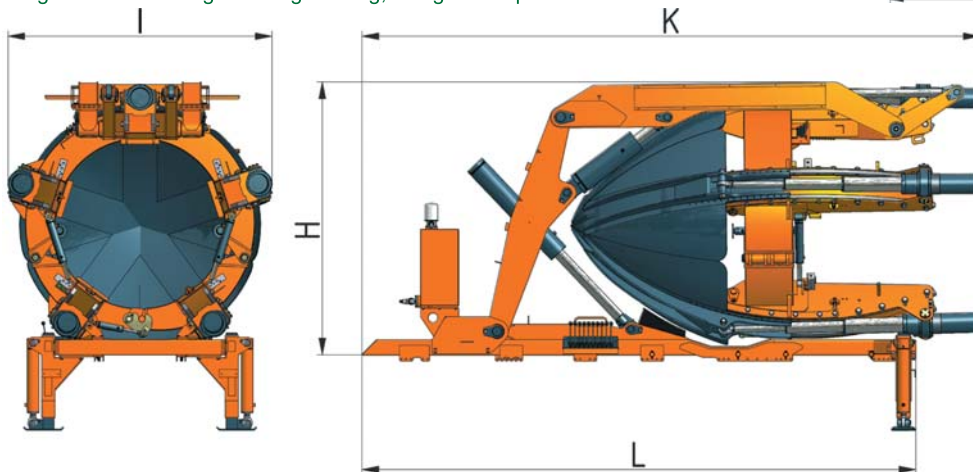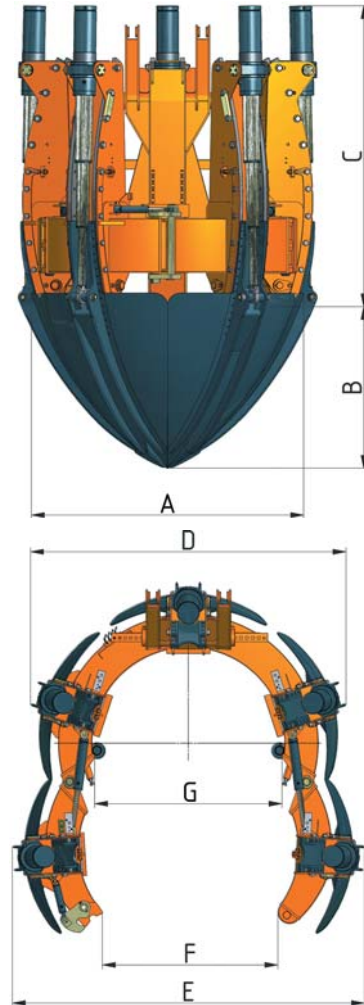

Distributor:



Fieldworks Nursery Equipment
 5191 Dawes Rd
 Grand Bay AL 36541
 USA
 Phone1: (251) 490-9871
 Phone2: (251) 633-3400
 Fieldgrown@gmail.com
<http://optimaltreespades.com>

Manufacturer:



Optimal-Vertrieb Opitz GmbH
 Eysölden M 41
 91177 Thalmässing
 Germany
 Tel. + 49 91 73/79 18 0
 Fax. + 49 91 73/79 18 49
info@opitz-optimal.com
www.opitz-optimal.com