



Optimal

optimal 900



Tree Spade



Requirements for Power Unit:

A Wheel Loader, Skid Steer Loader, Telescopic Loader

1 extra hydraulic circuit, double-acting, for implement attachment at front

- hydraulic working pressure 160 - 200 bar (2,272-2,840 lbs./in²)
- oil flow 40-60 l per minute (11-26 GPM)
- tipping load approx. 2.500 kg (5,500 lbs.)
- lift capacity approx. 1.500 kg (3,300 lbs.)
- type of attachment quick-change frame or frame for fixed attachment
- controls electro-mechanic valves, rotary control switch

B Farm Tractor

1 extra hydraulic circuit, double-acting, for implement attachment at rear

- hydraulic working pressure 160 - 200 bar (2,272-2,840 lbs./in²)
- oil flow 40-60 l per minute (11-16 GPM)
- engine capacity, approx. 60 HP
- type of attachment lift mast HG 1500 with lateral slide
- controls 3 manual hydraulic valves for lift mast rotary control switch for tree spade
- optional PTO-driven hydraulic pump and oil depot

C Special attachments please enquire



Optimal

optimal 900






Tree Spade

Basic Machine:

upper rootball diameter, approx.	A	92 cm	(37")
rootball depth, approx.	B	62 cm	(25")
working height	C	141 cm	(56")
working width, gate closed	D	104 cm	(41")
working width, gate open	E	145 cm	(57")
clearance between open gate	F	66 cm	(26")
inner frame diameter	G	60 cm	(24")
weight, empty		598 kg	(1,316 lbs.)
volume of rootball, approx.		0,19 m ³	(6 FT ³)
number of blades		4	

Special Features

- Good visibility on working area
- collapsible spade towers for fast and precise spade alignment
- self-lubricating bearings, abrasion-resistant
- Locking system with non-contact and maintenance-free sensor

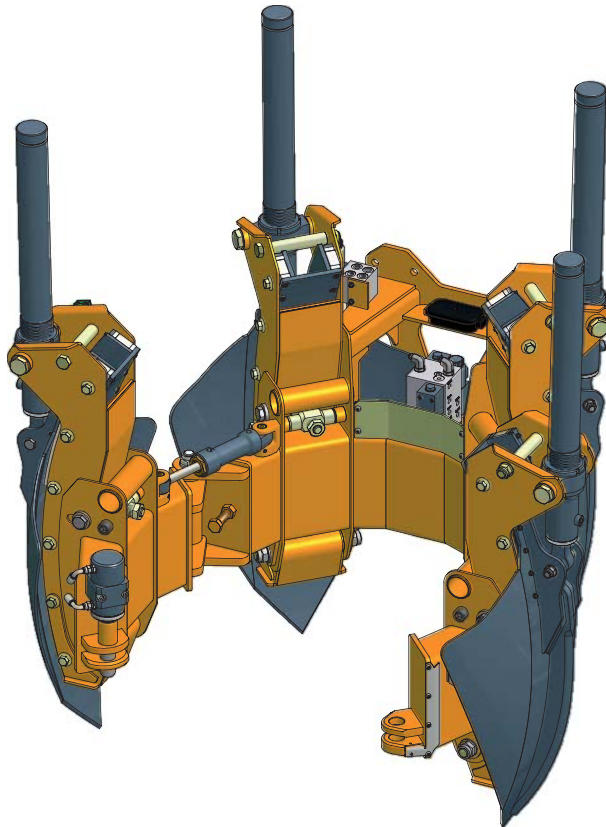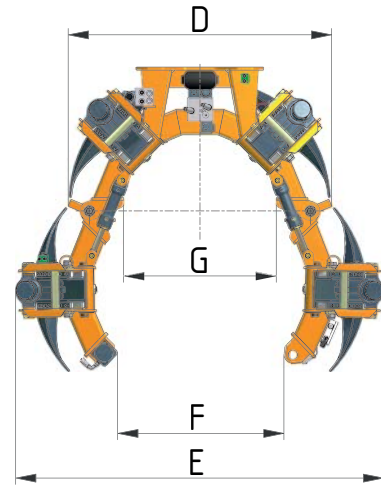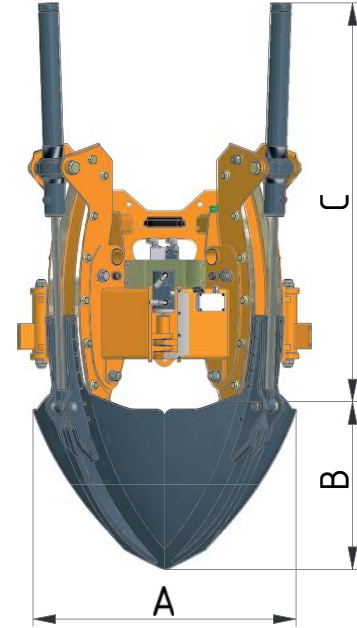

rotary control switch



Distributor:



Fieldworks Nursery Equipment
 5191 Dawes Rd
 Grand Bay AL 36541
 USA
 Phone1: (251) 490-9871
 Phone2: (251) 633-3400
 Fieldgrown@gmail.com
 http://optimaltreespades.com

Manufacturer:



Optimal-Vertrieb Opitz GmbH
 Eysölden M 41
 91177 Thalmässing
 Germany
 Tel. + 49 91 73/79 18 0
 Fax. + 49 91 73/79 18 49
 info@opitz-optimal.com
 www.opitz-optimal.com